

NL-F120RGB

LED Studio Soft Light

NL-F120RGB is a RGB type of NORDLYS SoftLights with narrow beam spread of light Enables creating pure red,green,blue and even mixture of them for any desire color Of light.

There is a special page in NORDLYS transmitter device(called TANYA) for our RGB Lights, with possibility of generating any color just by inserting RGB color code of The desire color; for instance vibrant hue of cyan color can be made by the fusion of Green and blue! and just a reminder,equal combination of all three basic colors ends Up to pure white light.

Also there is a visible color spectrum in RGB page that by touching each coordinates Of it, you'll be able to transfer that touched color to NL-F120RGB wirelessly!

It's worth mentioning,you can save your favorite color as presets and finally you can Have a dancing light in NL-F120RGB projector by capability of setting switching time!

Like every other NORDLYS devices and unlike Competitive light devices, NL-F120RGB is able to be moved horizontally (PAN movement) and vertically(TILT Movement) thanks to its built-in motors.

For the record, "NL-F250K2" supports standard protocol of light consoles(DMX) And standard protocol of joystick tables (Pelco-D).



Main Specification

- High resolution and smooth dimming With flicker-free light
- Wireless control of light and position With our local transmitter device called TANYA
- Due to the consumer's need, the Device is totally customizable to t your needs
- Device application: TV Studios, Black boxes, Theater scenes and all the locations with requirement of high quality light sources and precise color temperatures



Wireless
Controlled



Programmable
Customize



Upgradeable
Creative Minds



Guarantee
Protection LED



Broadcast
Professional



Dimmable
Controlled



Environment
Friendly





Ip68
For Cob LED

Technical Features

- Input Voltage: 110-240 Vac , 50/60Hz
- Total Power Consumption: 120 Watt
- Color Rendering Index: (CRI, Ra \geq 97), TLCI \geq 98
- Estimated LED Lifetime: 50,000 H
- Working environment Temperature: -20°C ~ 60°C
- Maximum humidity of working environment : %85
- Energy efficiency : greater than 90% (high)
- DMX input/output Port type: XLR female/male connector
- Memory type: internal eeprom(saving last parameters:address,level,cct,etc)
- Optical consideration:
 1. Four leaf barndoors
 2. Substitutable diffusion panel (light,middle,heavy)
 3. Possibility of selecting LED lens angle (60,90,120)

Mechanical Features

- Dimension: 680 x 300 x 510 mm
- Weight: 9.7 Kg
- Lens Diameter: 200 mm
- Housing Material: Cast Aluminum
- Housing/Body color: Customizable
- Motors: PAN & TILT
- Mounting: Customizable (with clamp, pantograph,stand,etc)

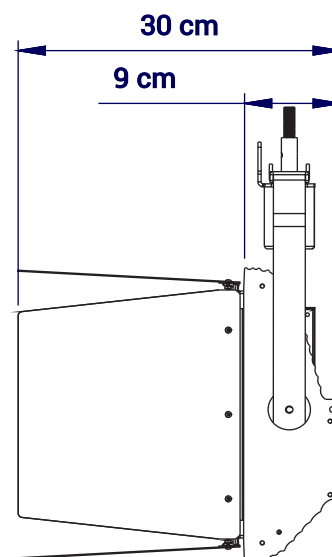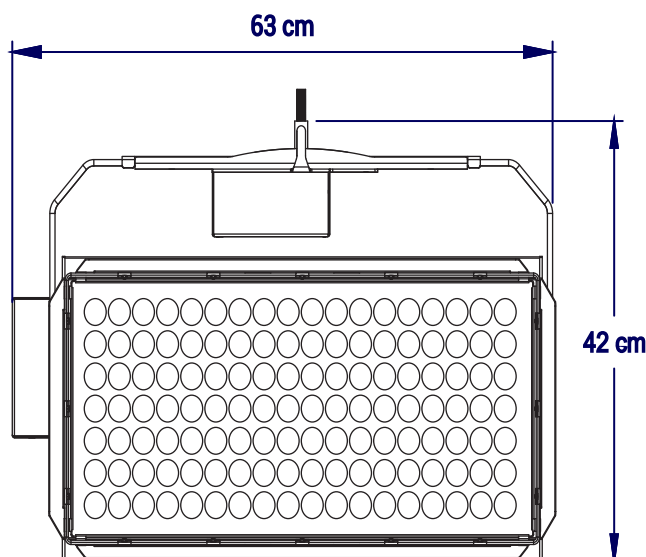



Nordlys, Naturally Noble

At Nordlys, we are driven by innovation, continuously pushing the boundaries of what's possible in broadcast technology. We envision a future where media professionals have access to the best equipment, enabling them to tell their stories with clarity, creativity, and confidence.